

◆ Technical Data:

Model:PR-12DC-DA-R

GENERAL SPECIFICATIONS

Timers : 512
 Counters : 512
 Function Blocks: 512
 Operation temp.: -20°C-55°C
 Storage : -40°C-70°C
 Protection : IP20(Non-waterproof)
 RTC accuracy: MAX ±2S/day
 RTC Backup at 25 °C: 20 days
 Program and settings Backup:10 years
 Data Power-off retentivity: 10 years
 Dimensions : 72*90*61 (Unit, mm)
 Certificate : CE
 Installation : 35mm-DIN rail or screw for installation
 Modify parameters via keypad LCD: yes
 Modbus RTU/ASCII:yes(Master or slave with RS232/RS485)
 Expansion: No

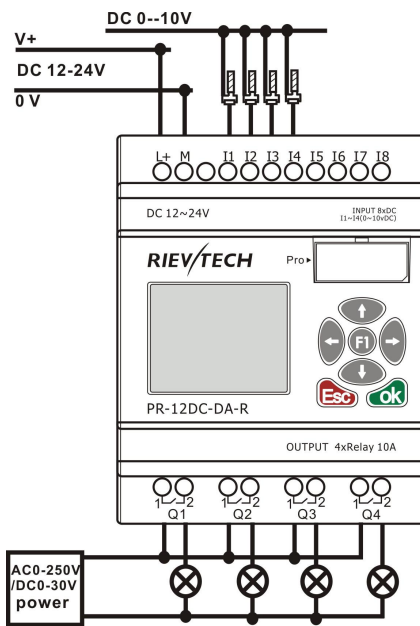
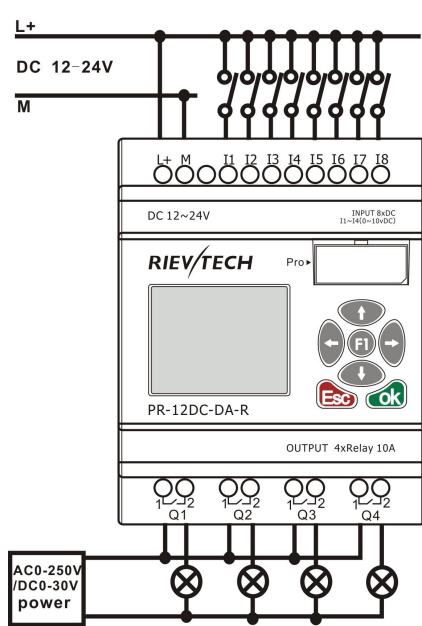
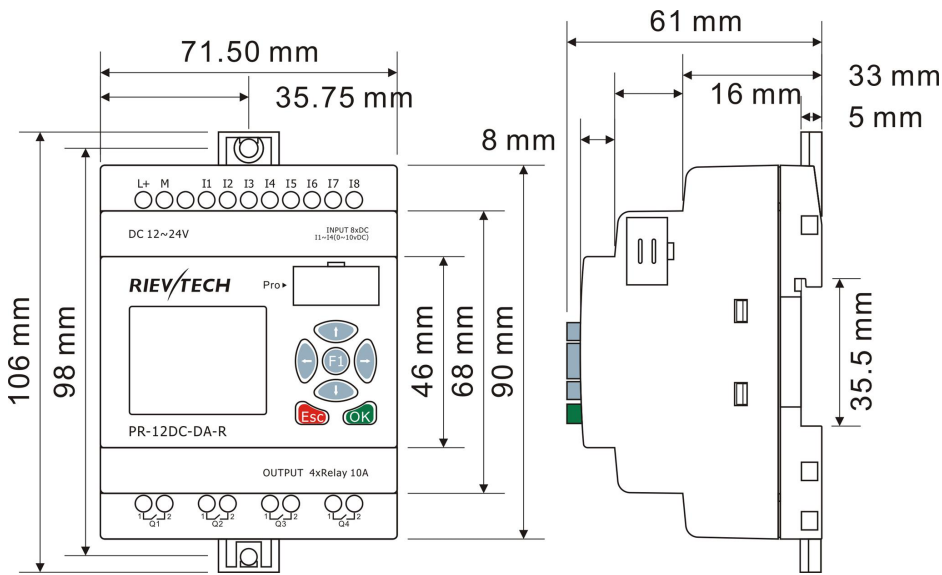


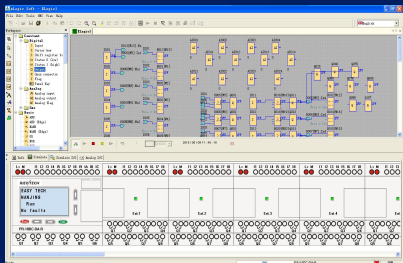











Technical Index

Power supply:	
Nominal voltage	DC 12-24V
Operating limits	DC 10.8-28.8V
Immunity from micro power cuts	Typ.5 ms
Max. Startup current	Max. 0.25A
Max. absorbed power	3.5 W (10.8V dc) ; 4 W (28.8V dc)
Protection against polarity inversions	Yes
Input parameters:	
Input No	8 (I1-I8)
Digital input	8 (I1-I8)
Analogue input	4 (I1-I4)(0..10V DC)
Digital inputs(I5-I8)	
Input voltage	DC0-28.8V
Input signal0	< 5V DC; <1mA
Input signal1	> 8 V DC;>1.7mA
Input current	2.3mA @ 10.8V dc 2.6mA @ 12.0 V dc 5.2 mA @ 24 V dc 6.3 mA @ 28.8 V dc
Response time	0 to 1 : <1 ms ; 1 to 0 : <1 ms
Maximum counting frequency	60k Hz(I5--I8)
Sensor type	Contact or 3-wire PNP

Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
Inputs used as digital inputs(I1-I4)	
Input voltage	DC0-28.8V
Input signal0	< 5V DC;<0.1mA
Input signal1	> 8 V DC;>0.3mA
Input current	0.4mA @ 10.8V dc 0.5mA @ 12.0 V dc 1.2mA @ 24 V dc 1.5mA @ 28.8 V dc
Response time	0 to 1 : Typ. 1.5 ms ; 1 to 0 : Typ. 1.5 ms
Maximum counting frequency	Typ.: 4 HZ
Sensor type	Contact or 3-wire PNP
Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
Inputs used as analog inputs(I1-I4)	
Measurement range	DC 0---10V
Input impedance	Min, 24K Ω ; Max. 72K Ω
Input voltage	28.8 V DC max
Resolution	10bit ,0.01V
Accuracy at 25 °C	\pm (Max.0.02)V
Accuracy at 55 °C	\pm (Max.0.04)V
Isolation between analog channel and power supply	None
Cable length	10 m max. shielded and twisted
Output parameters:	
Output No.	4 (Q1-Q4)
Output type	Relay output
Max. Allowable Power Force(Resistive)	CE: 10A,250V AC/DC30V UL/CUL:10A,250V AC; 5A, DC28V
Electrical durability Expectancy	10 ⁵ Operations at Rated Resistive Load
Mechanical life	10 ⁷ Operations at No Load condition
Response time	Operate Time : 15 mSec. Max. Release Time : 10 mSec. Max.
Built-in protections	Against short-circuits: None Against overvoltages and overloads: None
Switch frequency:	
Mechanism	10Hz
Resistor/light load	2Hz
Sensitive load	0.5Hz
Other parameters:	
Weight	Approx.300g

Installation Dimensions & Wiring Diagram



SYSTEM		Operating System requirements Windows /2000/XP/WIN7/WIN8		Function block 512 <0.1ms per function 4 lines x 16 characters Up to 70 function blocks		
BASIC	Timers					a.On-delay; b.Off-delay etc. Up to 12 kind Timers
	Maximum Number	512				
	Timing Ranges	10ms--99 h59m				
	Counters					a.Up/down Counter b.Hours Counter c.Frequency Threshold Trigger
	Maximum Number	512				
	Highest Count	99999999				
	Resolution	1				
	RTC				a.Weekly Timer b.Yearly Timer	
	Number available	512				
	Resolution	1 min				
	Time span available	Week/year-month-day-hour-min				
	Flags				a.Digital Flag b.Analog Flag	
	Digital flags	256				
	Analog flags	256				
	PI Functions				a.PI Controller	
Number available	30					
Parameter Ranges	1-32767					
Analog Math				a.Analog Math b.Analog Math Error detection		
Number available	512					
Function	ADD, Subtract,Multiply, Divide					
Analog Ramp Function				a. Analog Ramp		
Number available	55					
Compare Function				a.Analog compactor b.Comparison of 2 values		
Number available	512					
Special Functions	HMI Screens				a.Message texts	
	Number available	64				
	Display/Edit	Preset Current value and Free text				
	PWM Functions				a.PWM	
	Number available	512, (2 fast output for Transistor)				
	Communication Functions				a.Modbus write b.Modbus read	
	Number available	512(Only CPU works as Master need these 2 blocks, slave does not need)				
	Word/bit data Conversion	Square Boot	Sin/Cos	RS latch relay		
	Data-logger Function	Analog watchdog	Analog filter	Average value		
	Pumps Management	Defrost function	Multiplexer	Pulse Relay		
Cam Control	Astronomical clock	Stop watch	Boolean function			
Note: 1.Not all program functions are listed in this table i.e. AND,NAND,OR,NOT,NOR,XOR,SHIFT REGISTER,DATA LATCHING RELAY, COMPORT STATUS etc.						